

Fig. 1

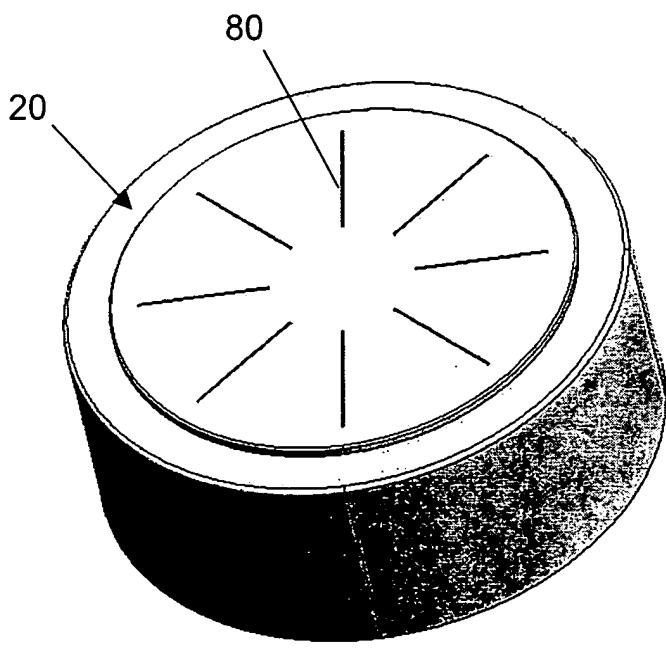


Fig. 2

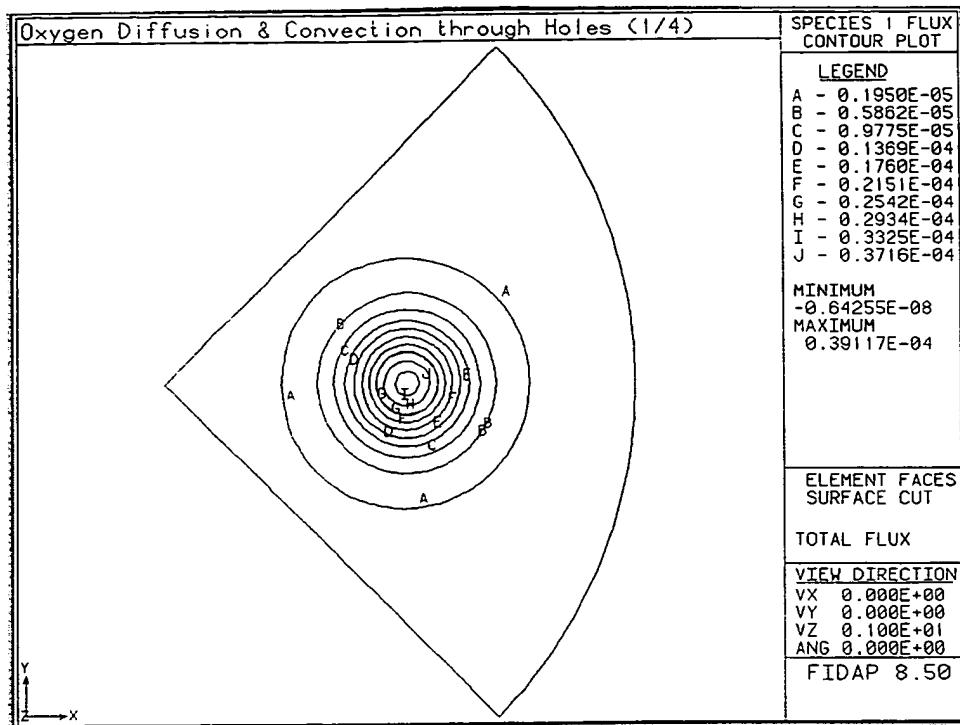


Fig. 3

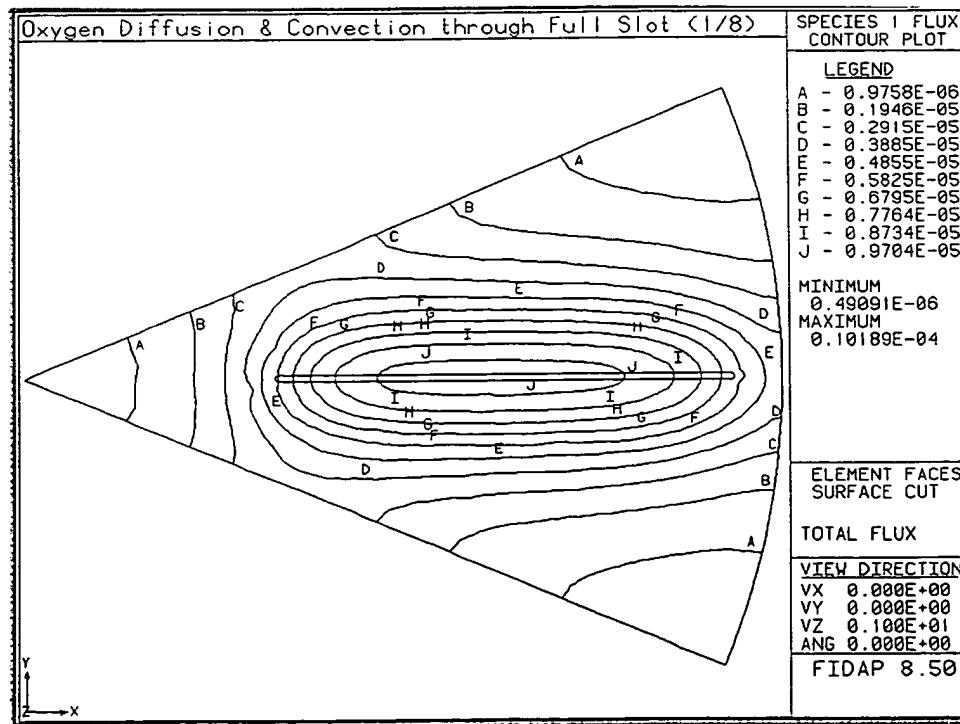


Fig. 4

1000 2000 3000 4000 5000 6000 7000 8000 9000 10000

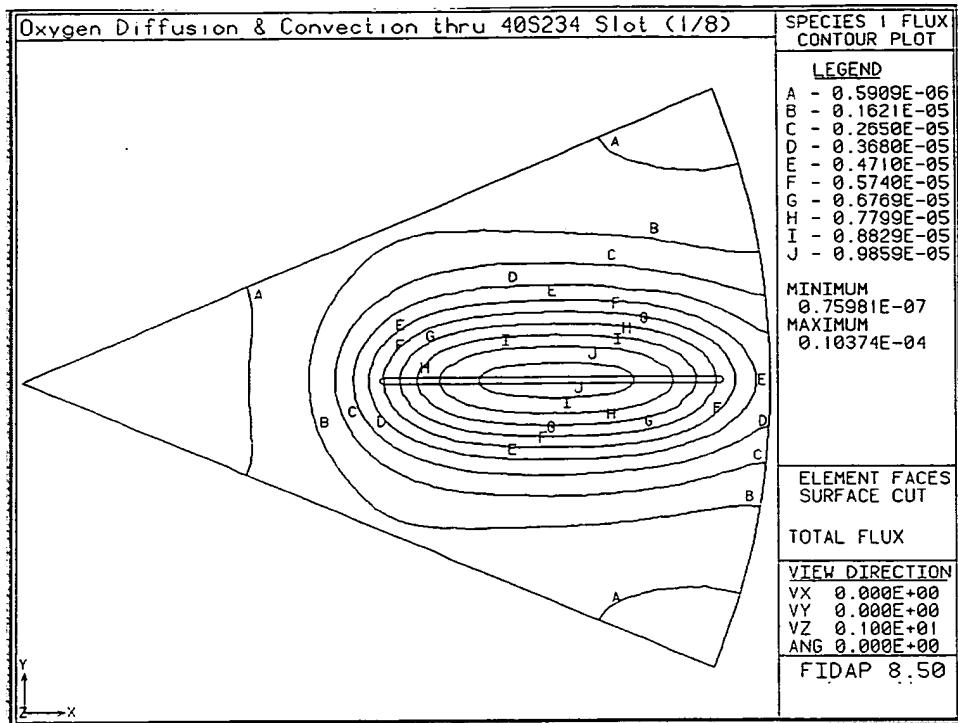


Fig. 5

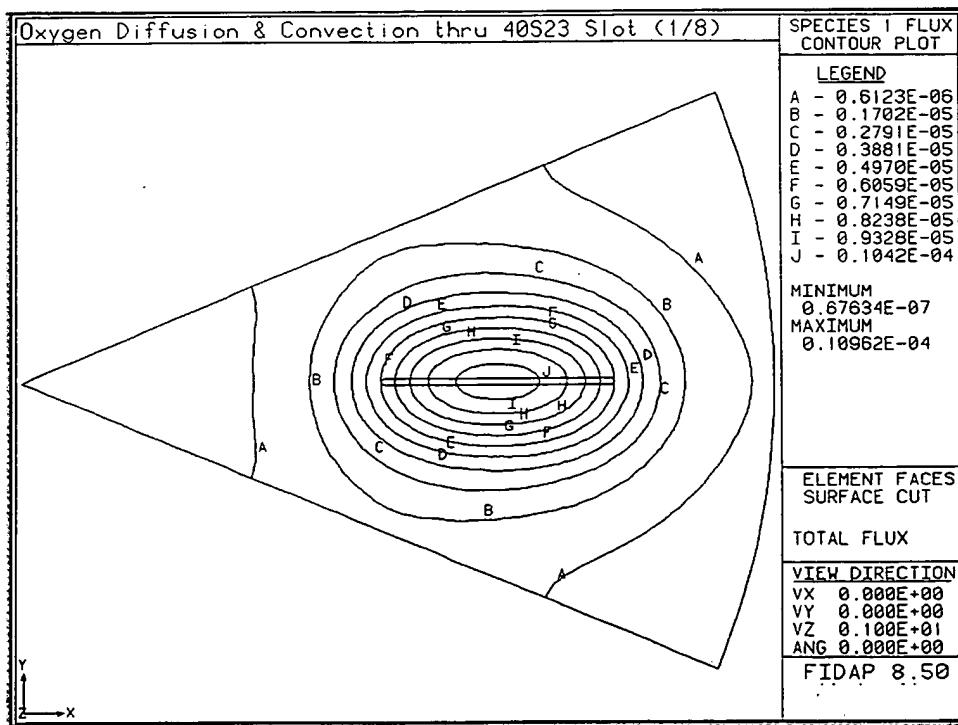


Fig. 6

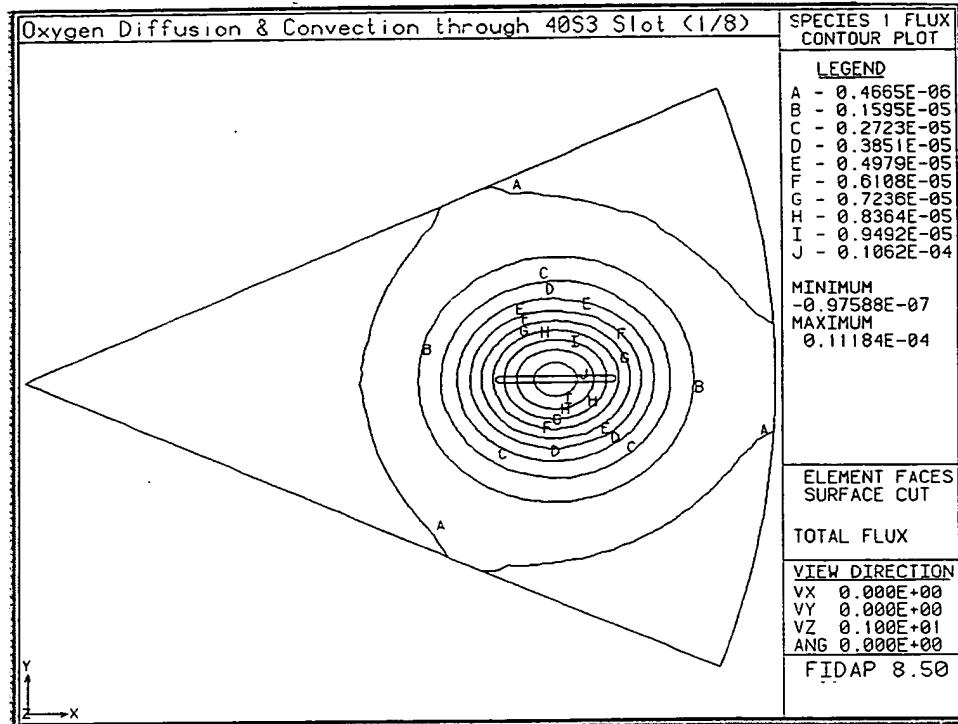


Fig. 7

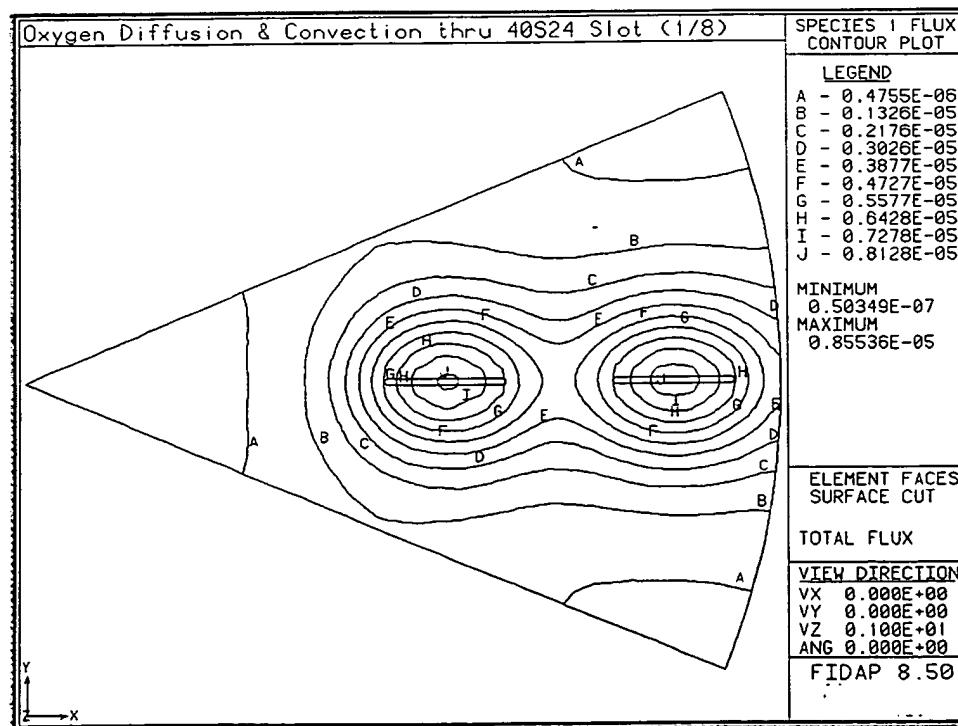


Fig. 8

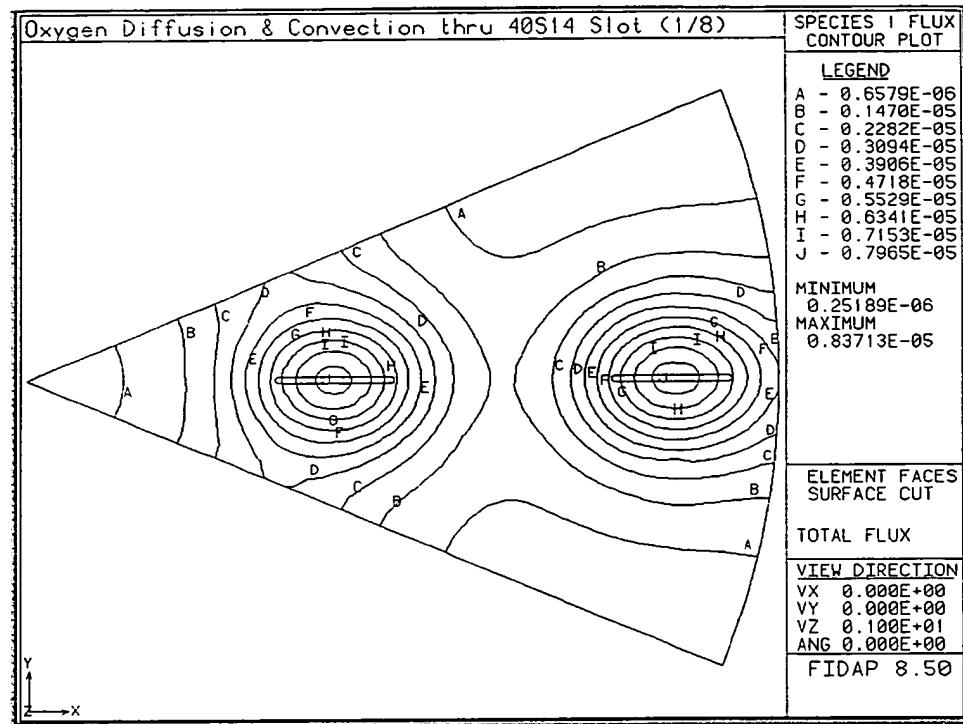


Fig. 9

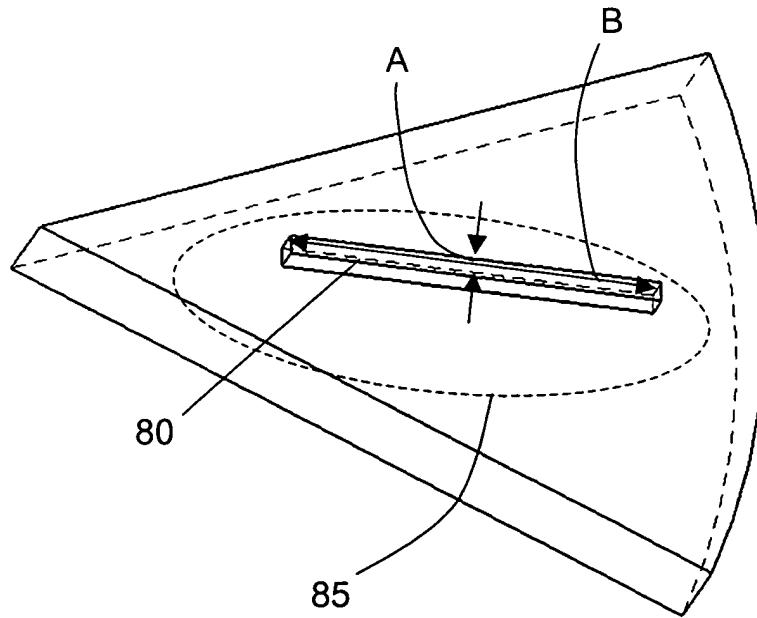


Fig. 10

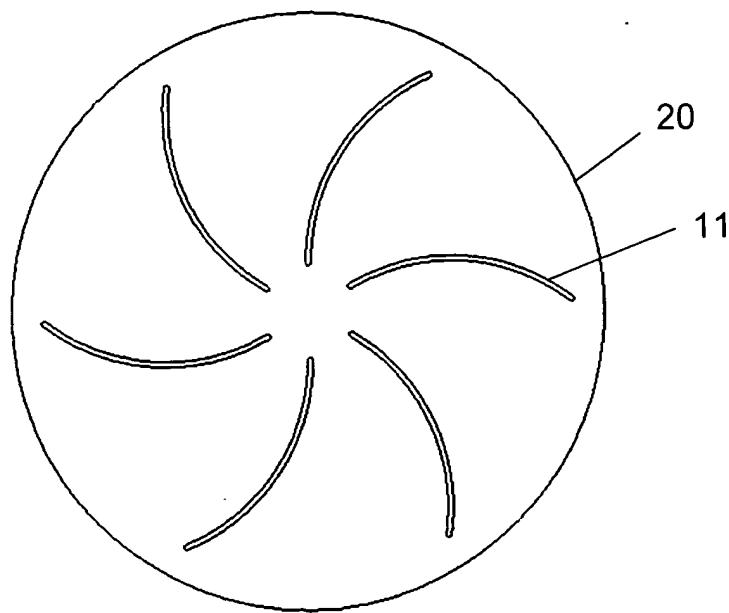


Fig. 11

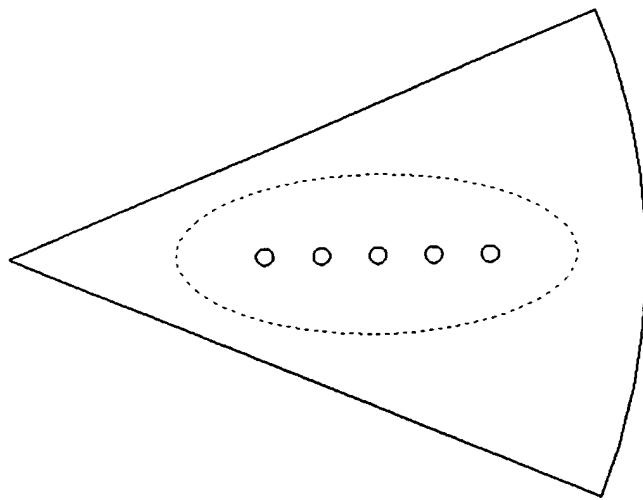


Fig. 12

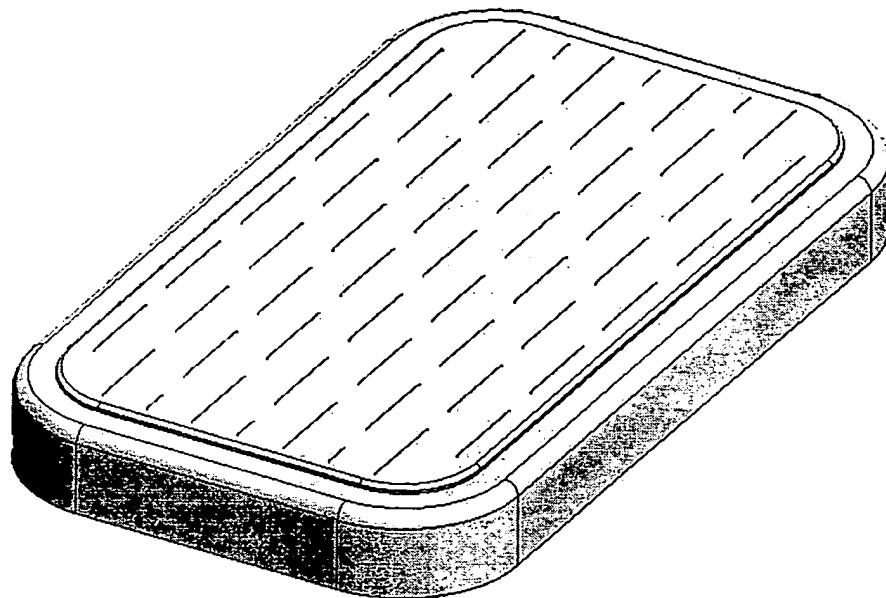


Fig. 13

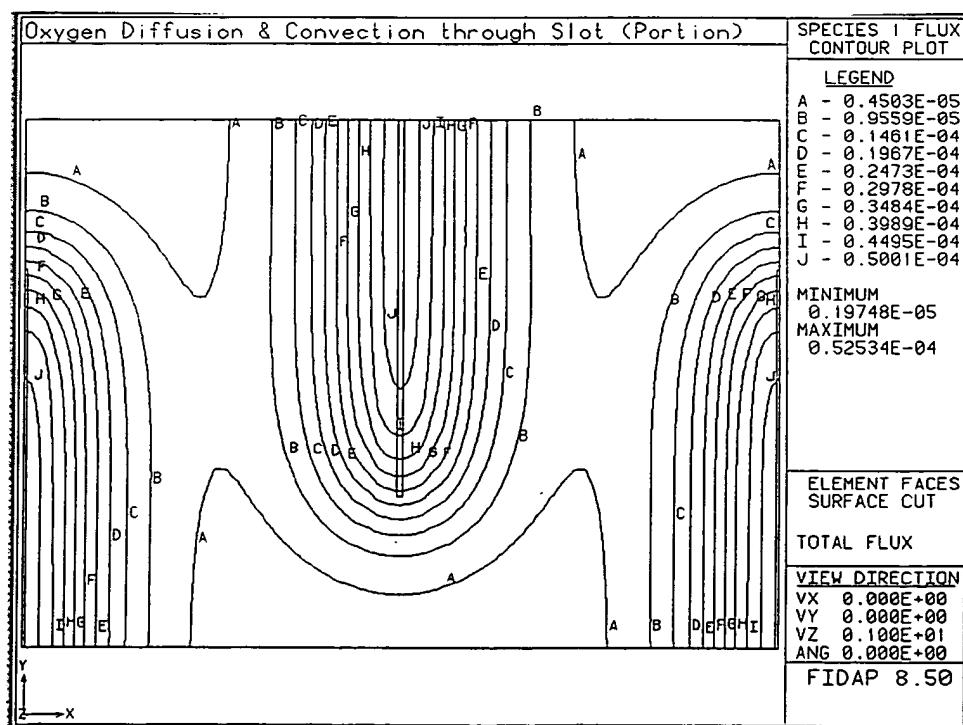


Fig. 14

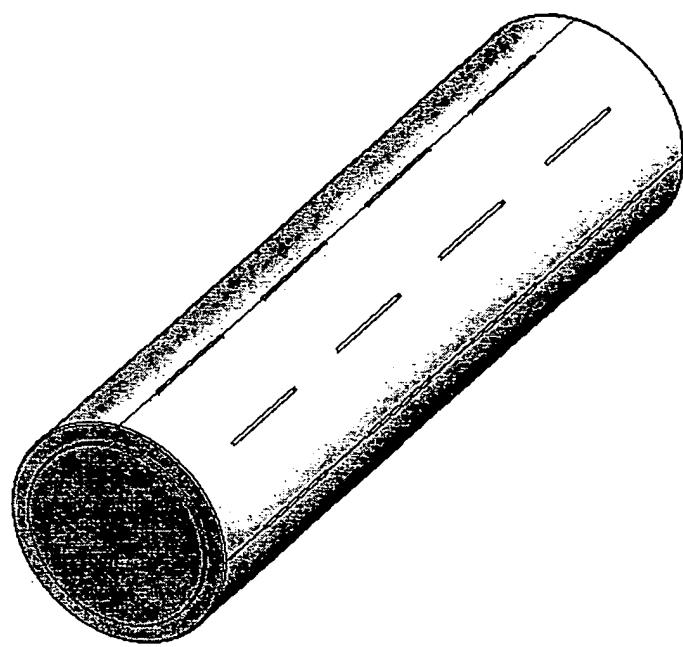


Fig. 15

1000 2000 2500 3000


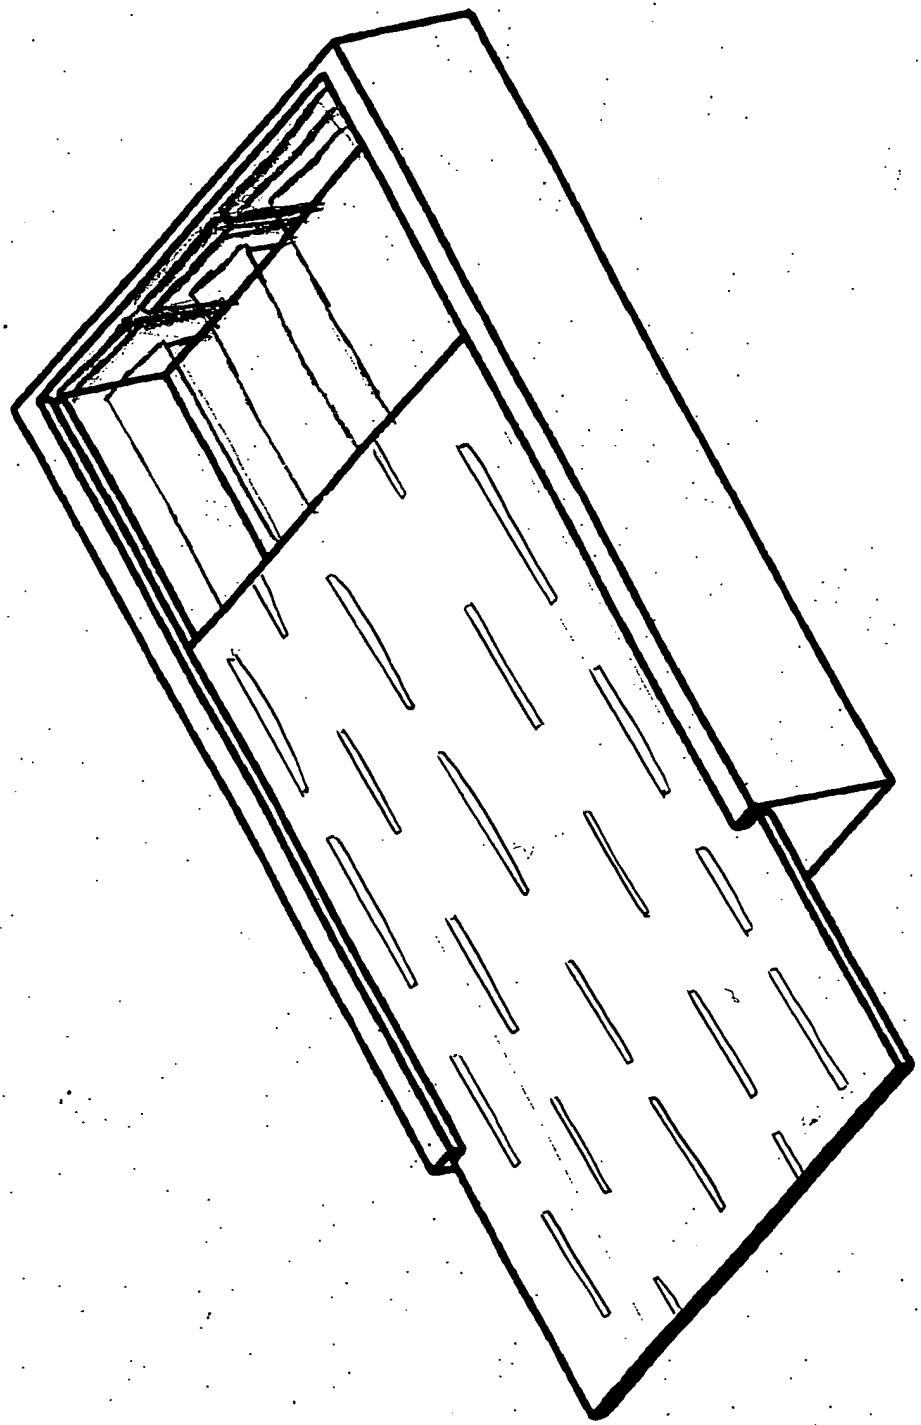


Fig 16

VARIOUS AIR ACCESS CONFIGURATIONS OF 675 SIZE BUTTON CELLS RAGONE PLOT - VOLUMETRIC

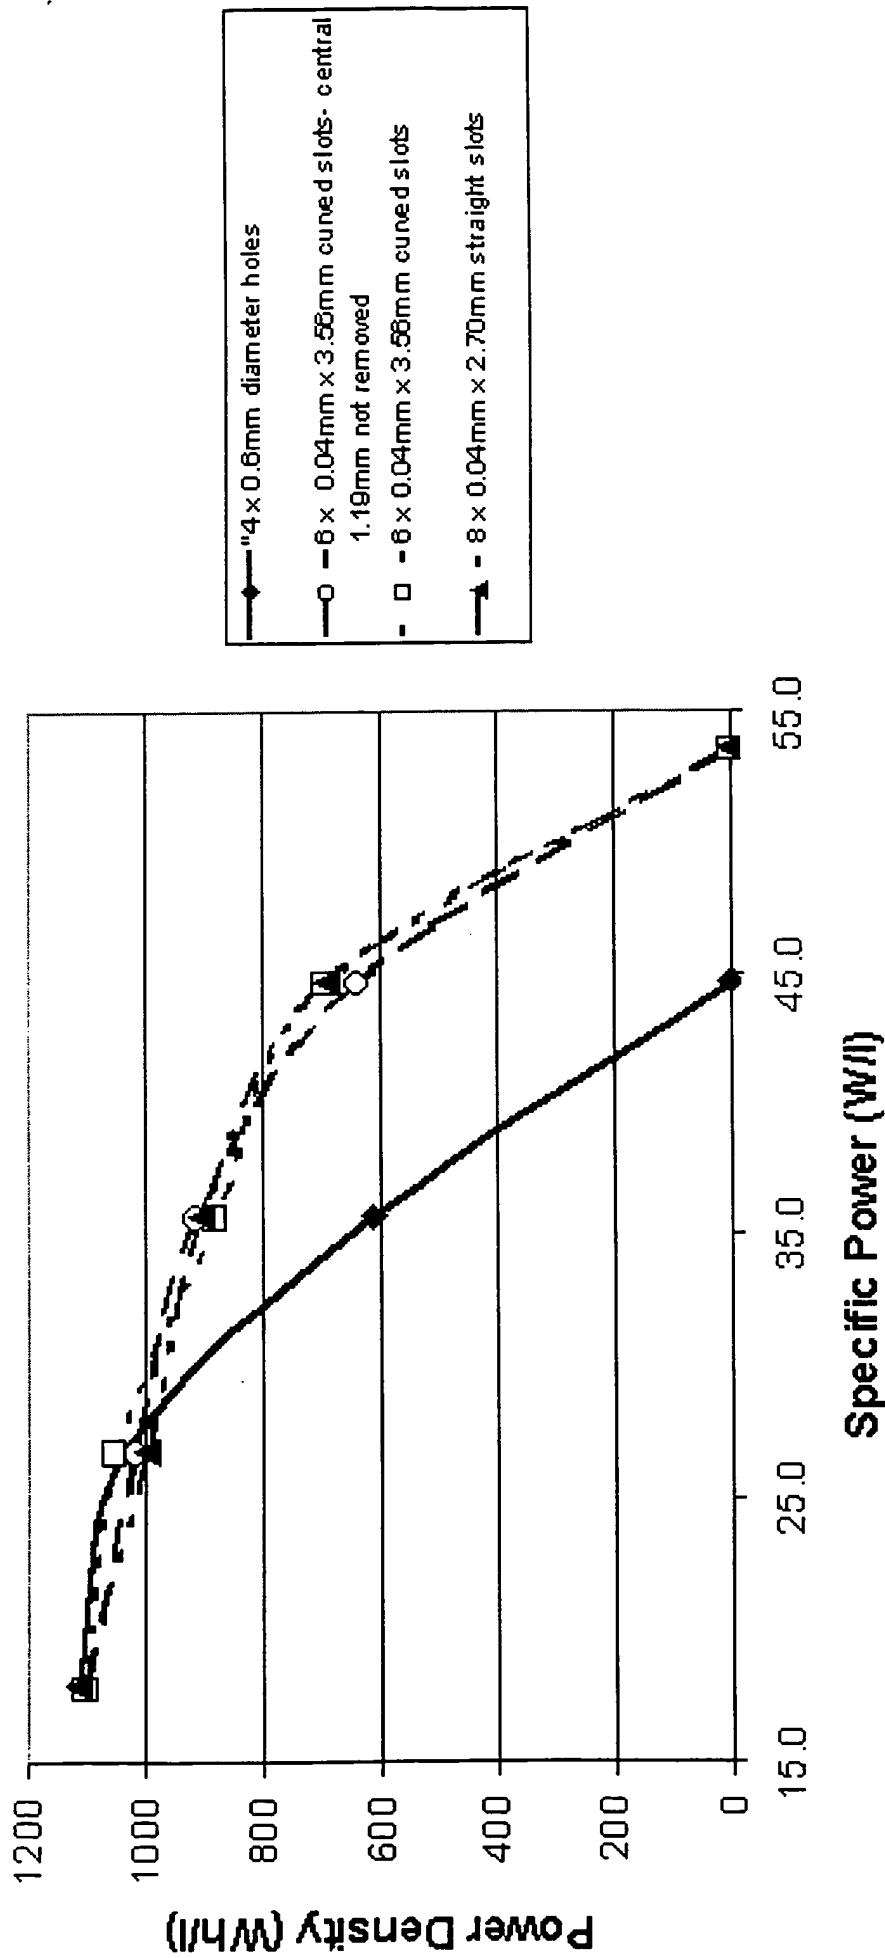

VARIOUS AIR ACCESS CONFIGURATIONS OF 675 SIZE BUTTON CELLS ANODE UTILISATION ON CONSTANT POWER DISCHARGE

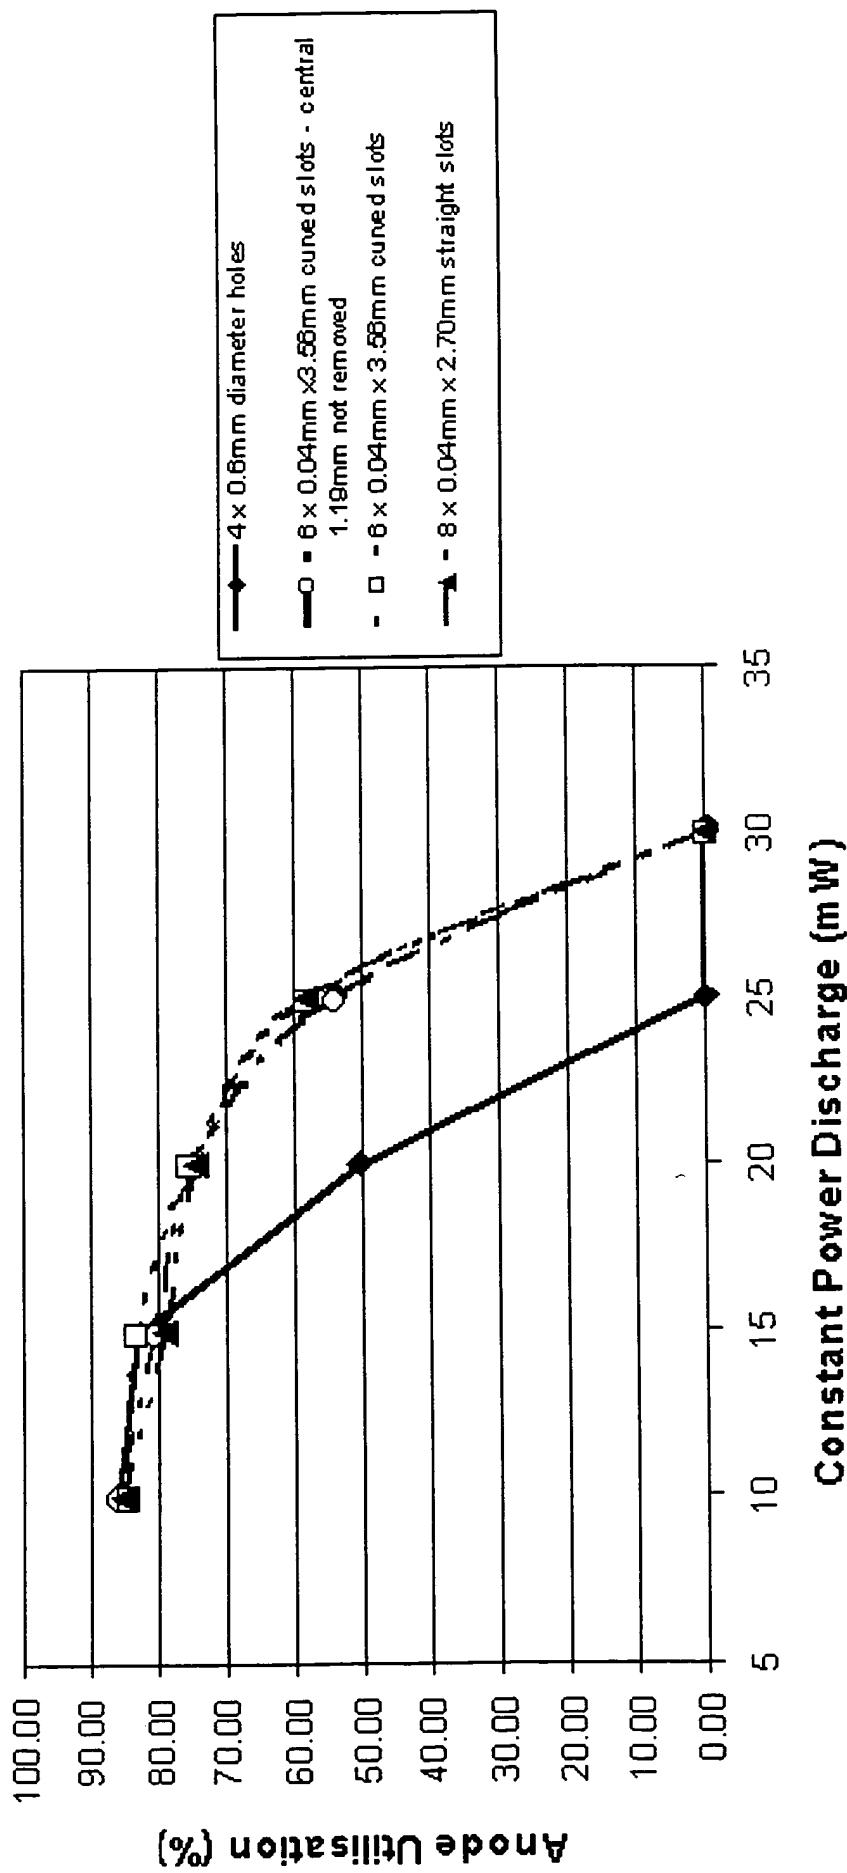


Fig. 18

GSM 900 SIMULATION START-UP FOR VARIOUS AIR-ACCESS CONFIGURATIONS
In 675 Size Button Cells

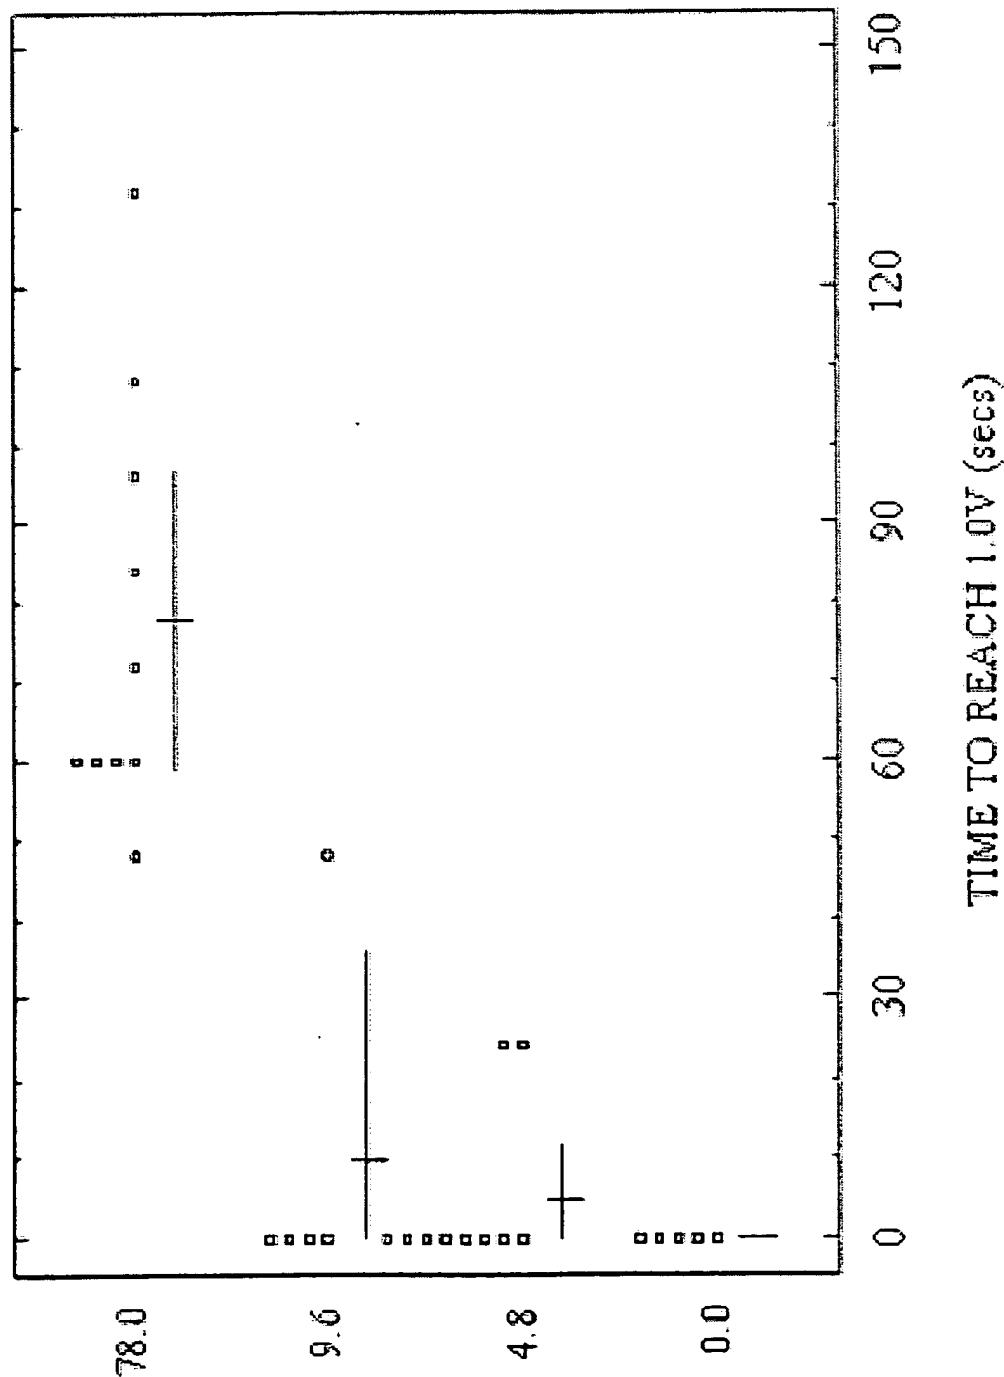


Fig. 19

GSM 900 SIMULATION FOR VARIOUS AIR-ACCESS CONFIGURATIONS

In 675 Size Button Cells

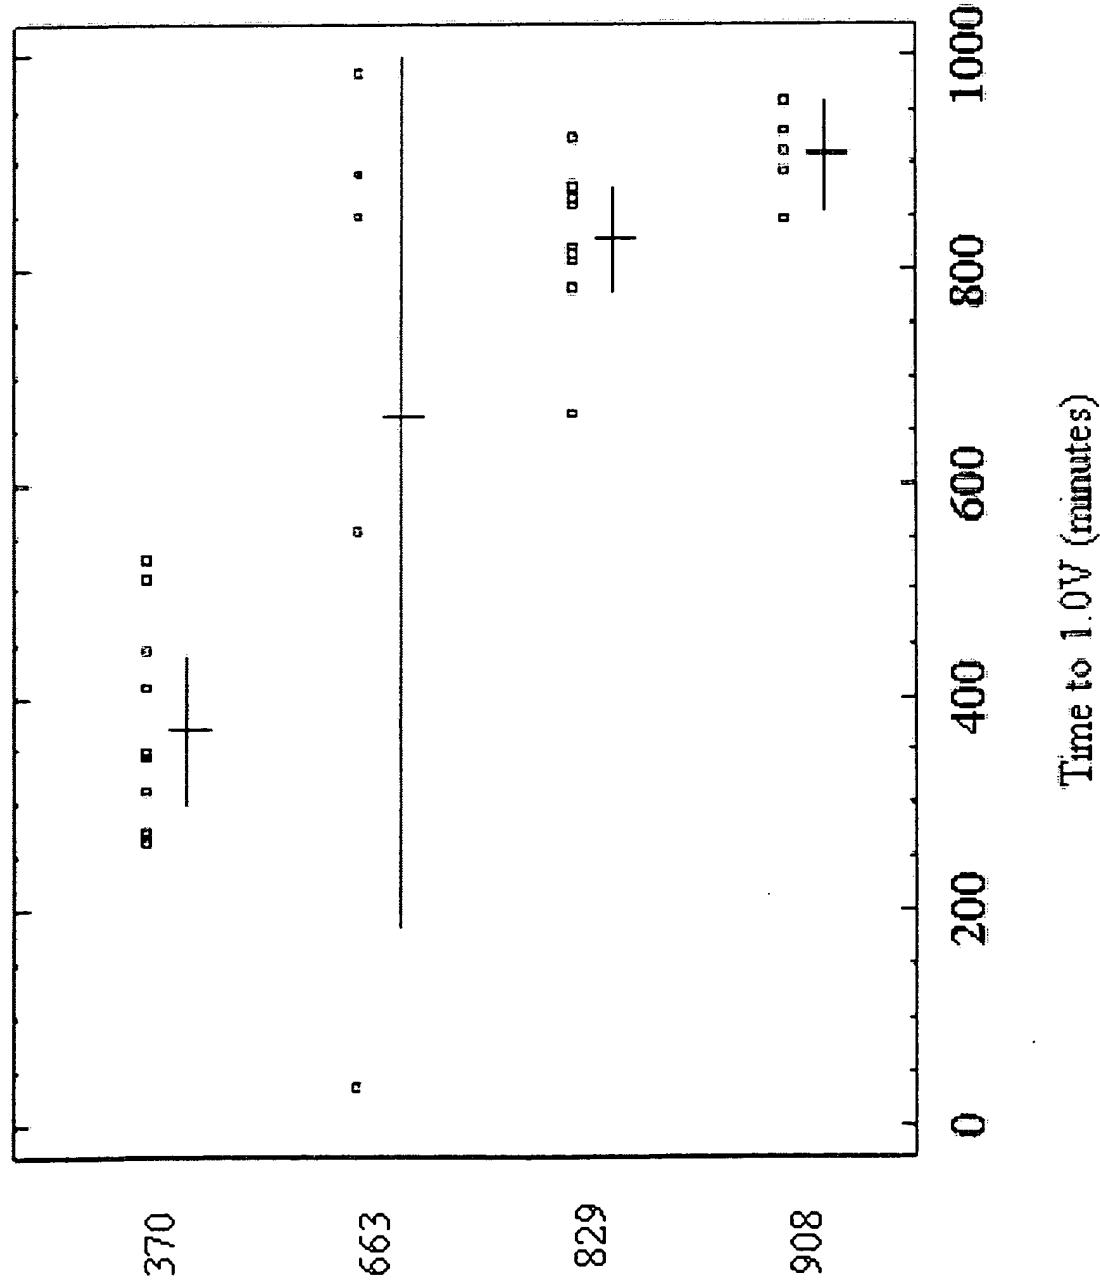


Fig. 20